Side Entry Float Switches T/LL Series

Application

The COLM (COntec Level Measurement) Side Entry series of single point float switches are manufactured in a range of materials to suit varied applications. Most switches are mounted from the outside of the tank and can be rotated through 180° to give a choice of either open on rise or close on rise switching configuration. Optional changeover switching can be specified. Some customisation can be offered, for example, should internal tank fittings impede the operation of the switch, or if a different connection method is required.

T/LL 12 specifications

Body:	Aluminium
Float:	Buna-N
Float arm:	304 Stainless Steel
Thread:	1/2" BSP

Electrical specification

Voltage:	240 V
Current:	1,0 A
Power:	10 VA
Connection:	24 AWG PVC Flying leads or DIN 43650 connector
Operation:	N/O or N/C

T/LL 12

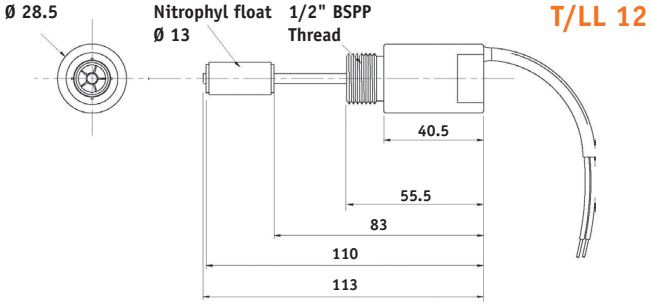

T/LL 15 specifications

Body:	304 Stainless Steel
Float:	Buna-N
Float arm:	304 Stainless Steel
Thread:	1/2" BSP

Electrical specification

Voltage:	240 V
Current:	1,0 A
Power:	10 VA
Connection:	0.75 mm² PVC Flying leads
Operation:	N/O or N/C

T/LL 15

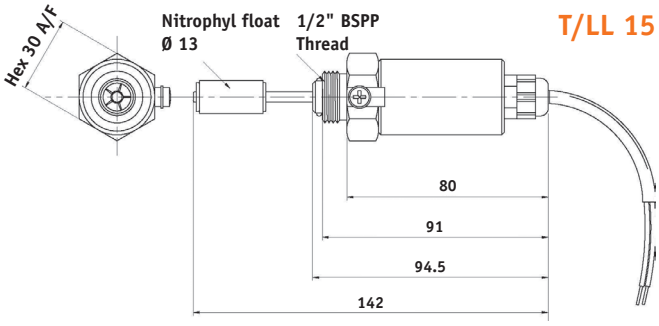

T/LL 17 specifications

Body:	Stainless Steel
Float:	Buna-N
Float arm:	304 Stainless Steel
Thread:	1/2" BSP

Electrical specification

Voltage:	240 V
Current:	1.0 A
Power:	10 VA
Connection:	DIN 43650 connector
Operation:	N/O or N/C

T/LL 17

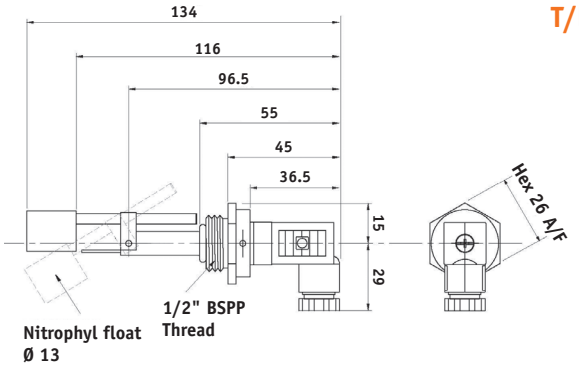

Environmental ratings

All types:	–20 °C bis +70 °C

CE

contec: clean solutions on demand®

©contec GmbH Industrieausrüstungen, October 2024, Technische Änderungen vorbehalten. Die Genauigkeit hängt von der korrekten Bemaßung ab.